



Product introduction

pump control valve is installed at the outlet of pump in high building water Supplying system and other to prevent backward flow, water-hammering, water-hitting. The valve has the function of the following valve: motorized valve, nonreturn valve and water-hammering eliminator and can improve the safety in the system. The valve has slow-open, quick-close and slow-close function to prevent water-hammering when open or close pump. Only push the button for closing or opening pump and the valve can run according to the pump's operation procedure with large flow and little pressure loss. Pump control valve has 2 types, Diaphragm type & piston type.

configuration drawing




Diaphragm type

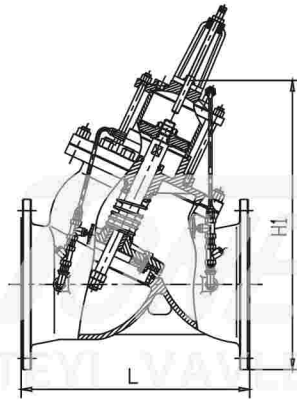

piston type



Installation drawing

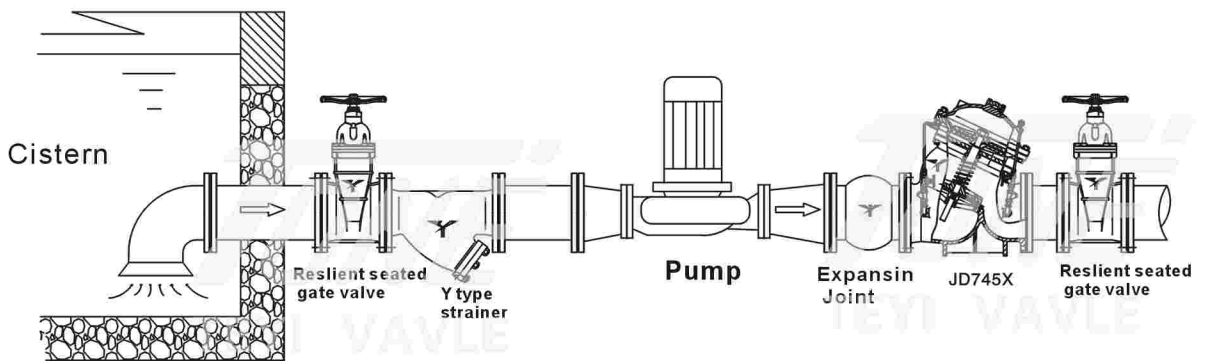

Main Dimension

公称通径 DN (mm)	40	50	65	80	100	125	150	200	250	300
L(mm)	240	240	270	300	350	400	480	500	605	700
	165	203	222	241	305	356	394	457	533	610
H(mm)	270	270	340	400	440	460	500	640	690	820
H1(mm)		293	328	364	418	481	543	673	729	927
公称通径 DN (mm)	350	400	450	500	600	700	800	900	1000	1200
L(mm)	800	900	900	1100	1150	1400	1500	1650	1800	2000
	686	762	864	914	1067	1350	1450			
H(mm)	950	1150	1180	1550	1600	1750	1900	2606	2765	
H1(mm)	957	1180	1218	1600	1800	2000	2300	2600	2700	2880