



Product introduction

500X pressure relieving/sustaining valve is used in fire protection or other feeding system to prevent overpressure of system or to maintain the needed pressure in fire protection. It can weaken water-hammering after fire pump stops. It is used in water-hammering elimination equipment in large-scale feeding system. There is one piece of self-cleaning mesh installed at the inlet of the valve's control system to assure the system run without any block. The system runs stably and it's strength is very high and it's life is very long. It is suitable for DN600mm or less pipeline.

configuration drawing

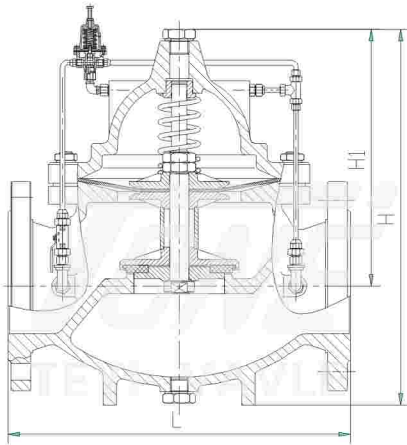

Installation drawing

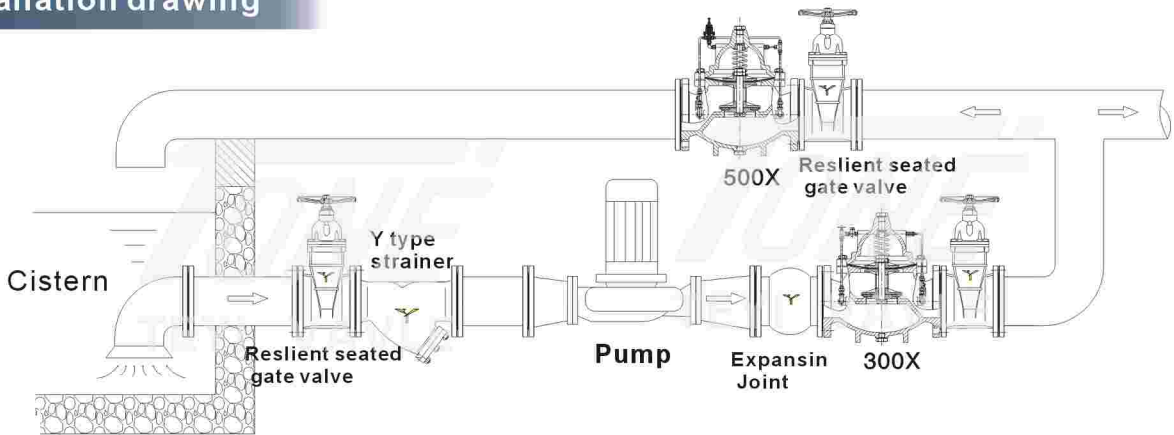

Main Dimension

公称通径 DN (mm)	50	65	80	100	125	150	200
L(mm)	230	250	241	292	330	356	495
H(mm)	270	305	320	400	455	502	636
H1(mm)	200	210	220	260	310	342	413
公称通径 DN (mm)	250	300	350	400	450	500	600
L(mm)	622	698	787	900	978	1075	1230
H(mm)	750	913	913	1035	1035	1300	1370
H1(mm)	510	600	600	685	685	880	950